

D7G Track-Type Tractor

Bulldozer Specifications

Blade	Overall Width (tractor plus dozer)		Blade Height		Digging Depth		Blade Capacity		Maximum Tilt		Weight without Hyd Control		Side Angling deg.	Ground Clearance	
	mm	in	mm	in	mm	in	m ³	yd ³	mm	in	kg	lb		mm	in
7A	4270	168	970	38	480	18.9	2.90	3.80	300	12	3110	6850	25	1190	46.9
7S	3660	144	1270	50	447	17.5	4.20	5.50	720	28	3475	7660	—	1170	46.1
7U	3810	152	1270	50	447	17.5	5.80	7.60	750	29.5	3820	8420	—	1170	46.1

Ripper Specifications


Type	Weight without Hyd Control		Maximum Digging Depth		Max. Clearance Raised		Overall Width		Ripper Beam No. Pockets	Pocket Spacing	
	kg	lb	mm	in	mm	in	mm	in		mm	in
Fixed Parallelogram	2590	5710	740	29	483	19	2210	87	3	991	39

Winch Specifications

Model	Weight		Height to Drum Center		Height to Hitch Center		Overall Width		Drum Diameter		Wire Rope Diameter		Wire Rope Drum Capacity		Oil Refill Capacity	
	kg	lb	mm	in	mm	in	mm	in	mm	in	mm	in	m	ft	liter	US gal
PA57G	1727	3800	1176	46.3	610	24	1148	45.2	305	12	25	1.0	73	239	75	20

Dimensions

All dimensions are approximate.

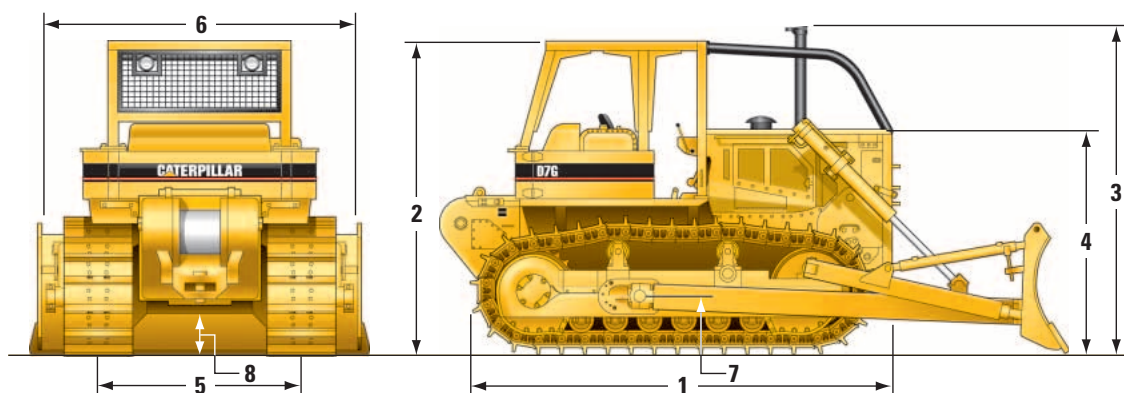

1	Overall length	4190 mm	(165.0 in)
2	Height to top of ROPS canopy	3250 mm	(130.0 in)
3	Height to top of exhaust	3350 mm	(132.0 in)
4	Height to top of radiator	2160 mm	(85.0 in)
5	Track Gauge	1980 mm	(78.0 in)
6	Width over trunnion	2620 mm	(103.0 in)
7	Height to bulldozer trunnion	480 mm	(18.9 in)
8	Ground clearance (SAE J894)	347 mm	(13.7 in)

To overall length (1), add the following dimensions for respective attachments:

Angle Bulldozer	1300 mm	(51.2 in)
Straight Bulldozer	1090 mm	(42.9 in)
Universal Bulldozer	1570 mm	(61.8 in)
Ripper	1650 mm	(65.0 in)
PA57G Winch	973 mm	(38.3 in)